

SILICONE X-TREME TAPE™

THE TAPE YOU HAVE TO X-PERIENCE!


SILICONE TAPE & INSULATION WRAP

X-TREME TAPE™ COMPARED TO HEAT SHRINKABLE TUBING

Shrink tubing has a standard 3 to 1 shrink ratio. X-TREME TAPE™ insulates regardless of wire and connector size.

Carry a single roll of X-TREME TAPE™ compared to multiple tube diameters and lengths.

Low Cost. Major labor savings with in-field operations.




POST CONNECTION INSULATION

Shrink tubing must be slipped over the wire before final connection.

X-TREME TAPE™ can be applied anytime.

No costly or labor consuming heat guns with X-TREME TAPE™. Simply stretch the X-TREME TAPE™ for an elastic seal.

X-TREME TAPE™ allows easy connection access. There is no wire cutting. There is no connector damage, or disassembly to re-insulate.

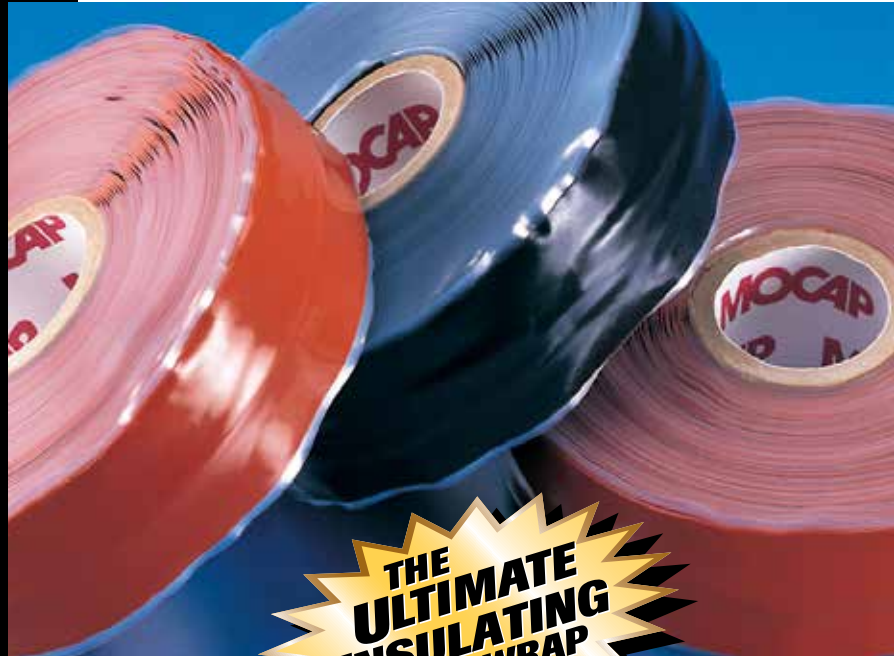

THE ULTIMATE INSULATING WRAP

- ✘ Cable and Wire Insulation
- ✘ Radio and TV Systems
- ✘ Electrical
- ✘ Telecommunications
- ✘ Automotive (Under Hood)
- ✘ Marine Motors
- ✘ Satellite Installation
- ✘ Electrical Coil Insulation
- ✘ Won't Melt Up to +260°C (500°F)
- ✘ Remains Flexible to -50°C (-60°F)
- ✘ Air & Moisture Seal
- ✘ Tensile Strength of 700 psi
- ✘ Insulates to 400 volts/mil
- ✘ Seals Irregular Shapes
- ✘ Elastic Memory Seal
- ✘ Resists Weathering

X-TREME TAPE™ provides low-cost insulation, yet strong enough for extreme environments.

Self-fusing X-TREME TAPE™ has no adhesive. X-TREME TAPE™ bonds to itself and completely fuses into a single insulating wrap after 24 hours at room temperature.

The stretch seal retains its elastic memory.

MOCAP®

www.XTremeTape.com

800.633.6775 • 314.543.4000 • sales@mocap.com

409 Parkway Drive • Park Hills, Missouri 63601

MADE IN

U. S. A.

Electrical & Mechanical Specifications

Typical Properties	Test Method	Performance
Operating Temperature Ranges:		
Continuous:		-45°C to 200°C (-50°F to 400°F)
Intermittent:		-65°C to 260°C (-80°F to 500°F)
Specific Gravity	ASTM D792	1.2 ± .03
Hardness, Durometer, Shore A	ASTM D2240	
Room-cured – 24 Hours:		55 ± 5
Tensile Strength	ASTM D412	700 psi min.
Elongation	ASTM D412	300% min
Tear Strength	ASTM D624, Die B	60ppi min.
Bond Strength	MIL-I-46852	2 lbs. Min.
Adhesion, unwind	ASTM D2148	3 in. min.
Cold Brittle Point	ASTM D2137	-54°C (-65°F)
Water Absorption, by weight	Fed. Std. 601, Meth. 6251	5% max.
Dielectric Strength	ASTM D149	400Vpm min.
Dielectric Constant, 1kHz	ASTM D150	2.95
Dissipation Factor, 1kHz	ASTM D150	< 0.0004
Volume Resistivity	ASTM D257	1 x 10 ¹³ OHMS/cm min.

Relation and Compliance to Industry Standards

- A-A-59163: Which supercedes MIL-I-46852C
- CPSIA: Consumer Product Safety Improvement Act
- PROP 65: The Safe Drinking Water and Toxic Enforcement Act of 1986
- Class H Insulator – National Electrical Manufacturers Association (NEMA)
- RoHS: Restriction of Hazardous Substances Directive 2002/95/EC
- REACH: Registration, Evaluation, Authorization and Restriction of Chemicals (EU Regulation)
- Flammability Testing: Per CPSC's ASTM F963-08

The Ultimate Insulating Wrap Product Line is UL Listed for use at not more than 600 V and at not more than 80°C (176°F).

General Performance Properties

Moisture Resistance • <i>Excellent</i>	UV Resistance • <i>Excellent</i>
Electrical Insulation • <i>Excellent</i>	Ozone Resistance • <i>Excellent</i>
Resilience • <i>Excellent</i>	Corrosion Prevention • <i>Excellent</i>
High Temperatures • <i>Excellent</i>	Solvent Resistance • <i>Good</i>
Flame Resistance • <i>Good</i>	Acid Resistance • <i>Good-Fair</i>
Abrasion Resistance • <i>Good</i>	Oil Resistance • <i>Good-Fair</i>
Tear Resistance • <i>Good</i>	Hydrocarbon Resistance • <i>Good-Fair</i>

X-Treme Tape has a 5 year shelf life (from date of manufacture) when stored at room temperature. Prolonged exposure to excessive temperatures can lessen the application bond of the tape.

Warranty: X-Treme Tape is warranted against defects in material and workmanship when used for the purposes intended, under normal conditions. The warranty applies to product only and does not apply to damages arising from use of the warranted product. The above values are typical performance data of silicone rubber tape and are not intended to be used as design data.



409 Parkway Drive • Park Hills, MO 63601
 314.543.4000 • 800.633.6775 • Fax 314.543.4111
www.mocap.com • www.xtremetape.com
sales@mocap.com

